



A Donaldson Company

A WORLD LEADER IN FUME EXTRACTION TECHNOLOGY

DustPRO 500 iQ

MECHANICAL ENGINEERING

Last Updated on 12.04.2021



Industrial particle and dust extractor.

BOFA's DustPRO 500 iQ mid range extraction system combines 100 litre capacity bag with high airflow and pressure rates, making it the ideal choice for heavy duty applications that generate large amounts of particulate, with the added protection of the large HEPA filter.

Performance has now been further enhanced with the inclusion of several new features including our iQ Operating System, making the new DustPRO 500 iQ one of the most advanced system available.

More information about the [Intelligent Operating System \(iQ\)](#).

Technology



Intelligent Operating System (iQ)



HEPA filter



Reverse flow air (RFA) technology



Automatic flow control (AFC) technology



Patented technology



ProTECT service plan



SureCHECK quality standard

Key features of the DustPRO 500 iQ

iQ Operating System
Standard

Reverse flow air filter technology
Standard

Brushless motor
Standard

HEPA filter technology
Standard

ProTECT
Standard

Remote stop / start interface
Optional

High airflow and pressure rates
Standard

Automatic flow control system
Standard

Filter blocked indicator
Standard

SureCHECK quality standard
Standard

Patented technology
Standard

Filter change / system fail signal
Optional

Contact BOFA at <https://bofainternational.com/en/contact/>


<https://bofainternational.com/en/portal/datasheets/dustpro-500-iq/>








Onboard compressor
Optional


Technical specification

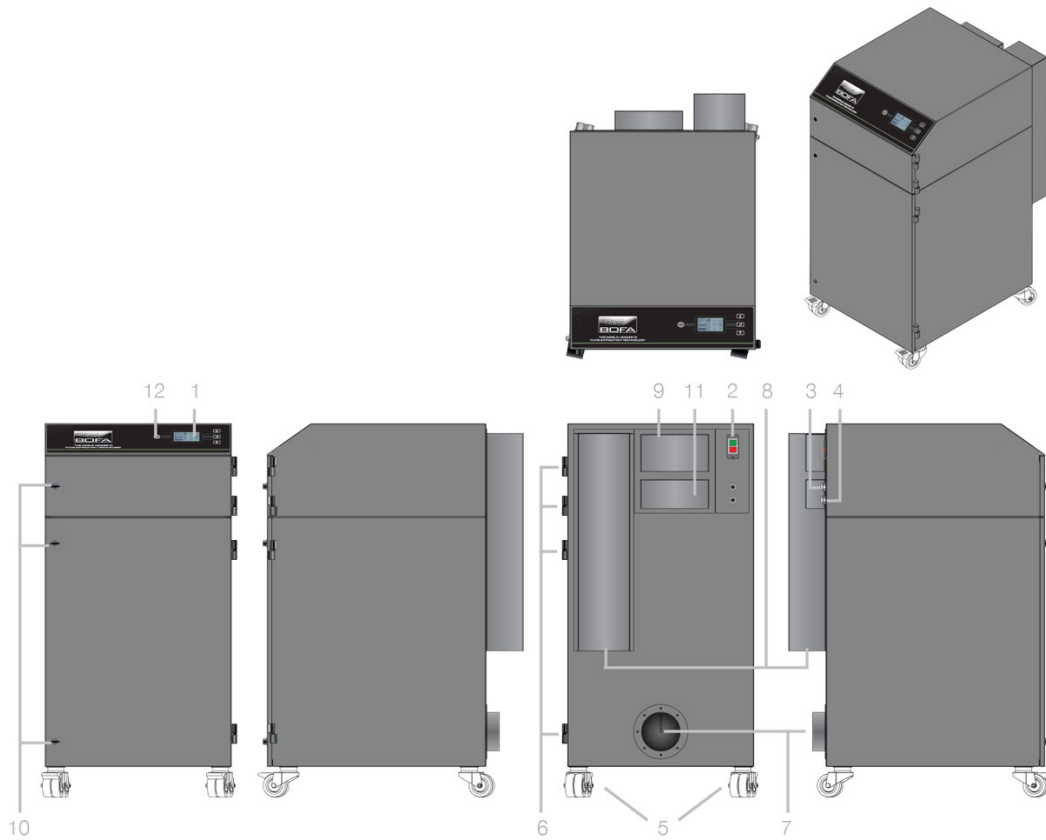- 1. Unit / filter condition display - automatic flow control
- 2. On / off switch
- 3. Signal / interface cable
- 4. Power cable
- 5. Castors
- 6. Door hinge
- 7. Hose inlet connection - 125mm
- 8. Exhaust outlet
- 9. Motor cooling inlet / outlet
- 10. Door latch



Airflow through filters

-  Bag filter
-  HEPA filter
-  Clean air
-  Contaminated air
-  Particulate

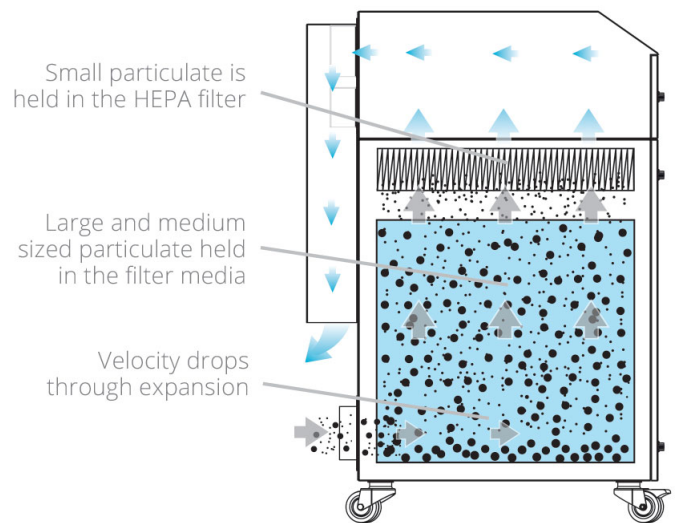

Technical data

	EU	US
Dimensions (HxWxD)	1205 x 615 x 790mm	47.44 x 24.21 x 31.10"
Cabinet construction	Powder coated mild steel	Powder coated mild steel
Airflow / pressure	550m ³ /hr / 100mbar	323cfm / 100mbar
Electrical data	230v Single-phase 1~ 50/60Hz Full load current: 9.1 amps / 1.1kw	115v Single-phase 1~ 50/60Hz Full load current: 14.3 amps / 1.1kw
Noise level	< 62dBA (at typical operating speed)	< 62dBA (at typical operating speed)
Weight	98kgs	216lbs
Approvals	UKCA and CE	cUL, UL *

Bag filter specifications

Volume area	100ltrs approx
Filter media	Polyester
Filter media construction	8 pocket bag filter
Surface media area	2.5m ² approx (26.9 ft ²)
Filter efficiency	95% @ 0.9 microns

HEPA filter specifications

HEPA filter media	Borosilicate
HEPA media construction	Maxi pleat construction with glue bead spacers
Surface media area	7.5m ² approx (80.7 ft ²)
Filter efficiency	99.997% @ 0.3 microns

Part numbers

Model	Voltage	Part number	24V stop/start	Filter change / system failure signal	Hose kit
DustPRO 500 iQ Powder coated	230V	D1042A	A2001	A2002	A1020069 125-125mm

Replacement filters

Model	Bag filter part number	HEPA filter part number
DustPRO 500 iQ	A1030262	A1030059

* Tested to UL and cUL standards, but testing may be provided by alternate nationally recognised test laboratories. Certain product configurations may affect the UL certification. Please speak to your sales representative.

Datasheet correct at time of publishing.

Where applicable, the carbon used in BOFA units is capable of removing a wide range of VOC's, however it is the responsibility of the user to ensure the carbon is suitable for their application. For specific applications, please contact us for details.

Think before you print! Please consider the environment before printing this document.

