

Caxtool Kft.  
6791 Szeged, Dorozsmai út 157. EU  
+36 62 254 826  
+36 30 565 1812  
[d.zanocz@caxtool.hu](mailto:d.zanocz@caxtool.hu)  
[info@caxtool.hu](mailto:info@caxtool.hu)

Adószám: 12871856-2-06  
Adószám: HU 12871856  
Bankszámla száma: 57600101-11102986  
SWIFT (BIC): TAKBHUHB  
IBAN: HUG5 57600101 11102986 00000000  
cégjegyzékszám: 06-09-014002  
info:

## Képgyűjtemény


### Fiber lézervágó berendezés

CAXTC\_LM\_1325\_1.5kW\_J\_1.0 fiber lézervágó berendezés / Fiber cutting machine



- **Alkalmazási területek / Machine Application**

Widely used in sheetmetal processing, aviation, aerospace, electronics, electrical appliances, automobile, food machinery, textile machinery, engineering machinery, precision parts, ships, metallurgy equipment, elevators, household appliances, craft gifts, tool processing, decoration, advertising, and other fields. Professional used to cut sheet metal like carbon/mildsteel, stainless steel, aluminum alloy, galvanized sheet, electrolytic plate, titanium alloy, aluminum zinc plate, etc.

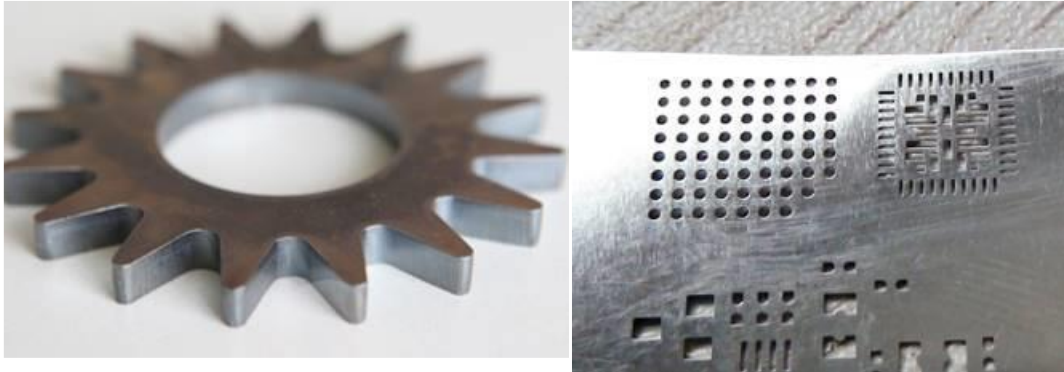

- **Lézer rezonátor / JPTCW 1500-SM-K Fiber Laser (1500W)**



Advantage of JPT CW laser source is that there are 2 high-reflection resistance devices in the laser stripping device. This advantage allows JPT laser source to apply for aluminum, brass and other high-reflective material cutting.

	Unit	Parameter				
Nominal Average Output Power	W	500	800	1000	1500	2000
Beam Parameter Product	mm*mrad	<2 @50um				
Central Wavelength	nm	1080				

Spectral Width@3db	nm	<6				
Armored Cable Length	M	8			15	
Cooling Method		Water Cooled (Purified Water)				
Operating Voltage	V	Single-phase 220(AC)±10%			Three-phase 380(AC)±10%	
Maximum Power Consumption	W	1800	2700	3300	5000	7000
Switch on/off time	us	<20				
Maximum Modulation Frequency	khz	20				
Operation Temperature	°C	23 ~ 26				
Storage Temperature	°C	-20 ~50				
N.W	kg	36			83.5	
Size (WxDxH)	mm	483 × 484 × 133			483 × 800 × 178	

- **Lézerfej / Laser Cutting Head RayTools BT240S**

RayTools BT240S laser cutting head. The laser head stably and rapidly adjust the laser head height during cutting, which ensures it cutting with the same and the best focal length all the time even if the metal sheet is not flat.

A variety of nozzle designs are available to match with different focal length lenses. The cutting head focal length adjustment precision is 0.01mm. Laser is invisible, there is red dot showing laser spot position on material.



- **Cooling SystemS&A CWFL-1500**


S&A brand CWFL-1500 water chiller is specially applied to cool the fiber laser and optic lenses at the same time, multiple use for saving cost, space and manual move, quite convenient for the user.

S&A industrial water chiller has 2 temperature control modes as constant temperature and intelligent temperature control. Under intelligent mode, the water temperature is adjusted according to ambient temperature. You do not need to worry about the water temperature adjustment of seasonal changes.



### Industrial water chillers for fiber lasers specification


CWFL-1500	CWFL-1500AN	CWFL-1500BN
Voltage	AC 1P 220 V	AC 1P 220 V
Frequency	50 Hz	60 Hz
Current	3.4~13.7A	3.4~14A
Machine power	2.78 kW	2.76 kW
Electric assisted power	400W + 600W	
Precision	± 0.5°C	
Reducer	Capillary	
Pump power	0.75 kW	
Tank capacity	15L	
Inlet and outlet	Rp1/2"+Rp1/2"	
Lift	53 M	
Rated flow	2 L/min + > 15 L/min	
N.W.	72 Kgs	
G.W.	82 Kgs	
Dimension	70 X 47 X 89 cm (L X W X H)	
Package dimension	74 X 61 X 104 cm (L X W X H)	

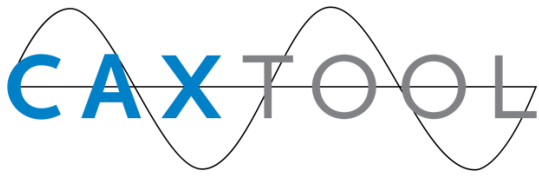

Caxtool Kft.  
6791 Szeged, Dorozsmai út 157. EU  
+36 62 254 826  
+36 30 565 1812  
[d.zanocz@caxtool.hu](mailto:d.zanocz@caxtool.hu)  
[info@caxtool.hu](mailto:info@caxtool.hu)

Adószám: 12871856-2-06  
Adószám: HU 12871856  
Bankszámla száma: 57600101-11102986  
SWIFT (BIC): TAKBHUHB  
IBAN: HUG5 57600101 11102986 00000000  
cégjegyzékszám: 06-09-014002  
info:

- **CNC Control System FSCUT2000C and Software CypCut**

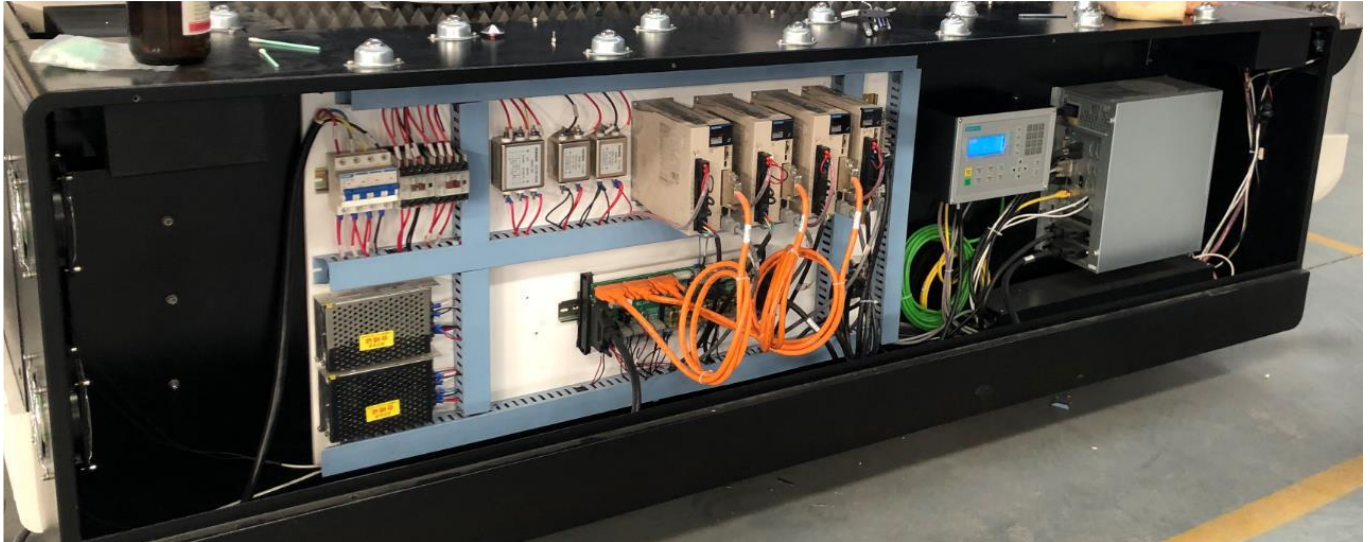

**FSCUT2000C** laser cutting control system and its **CypCut** software integrates file reading, design, output, and processing control. It's able to complete the entire process from design to processing. The software, installed in an industrial computer, provides a wealth of laser cutting processing parameters, flexible layout and cutting path editing capabilities. CypCut Control system and software in English language, supporting files: DXF, PLT, AI, LXD, etc. Drawing in the software is possible. Software is with fly cutting mode for cutting same products to save time. The nesting function automatically arranges graphs to leave minimum spaces and save materials.

- **Lineáris rendszer elemei / Transmission System**



Machine is with Taiwan YYC gear rack and PMI linear rail transmission, which ensures machine high speed movement, precision and stability as well.

- **Lineáris rendszer meghajtása / Driving system: Schneider servo, SHIMPO reducer**





Az alkalmazott servo motorok Schneider servo motors and drivers. X, Y1, Y2: Schneider 750W. Z: Schneider 400W. Motor reducer is SHIMPO.

- **Vezetékrendszer kenése / Auto Lubrication**



It automatically lubricates guide rails, which ensures the machine keep moving smoothly and with good precision.

- **Füst elszívó ventilátor / Exhaust System**




A 2.2Kw centrifugal exhaust fan strongly removes the fumes and dusts caused during cutting.

- **Gázvezérlő szelep / Gas Assist Valves (Solenoid Valve, SMC Proportional Valve)**





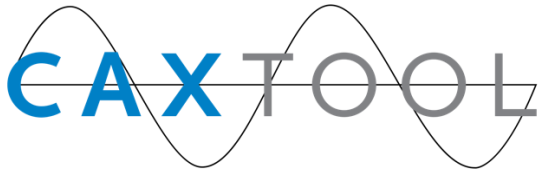

Caxtool Kft.  
6791 Szeged, Dorozsmai út 157. EU  
+36 62 254 826  
+36 30 565 1812  
[d.zanocz@caxtool.hu](mailto:d.zanocz@caxtool.hu)  
[info@caxtool.hu](mailto:info@caxtool.hu)

Adószám: 12871856-2-06  
Adószám: HU 12871856  
Bankszámla száma: 57600101-11102986  
SWIFT (BIC): TAKBHUHB  
IBAN: HUG5 57600101 11102986 00000000  
cégjegyzékszám: 06-09-014002  
info:

Gas assists cutting either in cutting speed, cutting thickness or cutting effect.


For example, oxygen helps to cut faster and thicker; nitrogen helps to get brighter cutting edge.

The solenoid valve controls the gas blowing. Gas blows only during cutting, which saves your gas cost. SMC proportional valve controls the gas pressure and brings good cutting all the time, for example, gas pressure is lowered when cutting corners.

- **Gépágy / Machine Body**





- **Gépasztal / Machine Table**

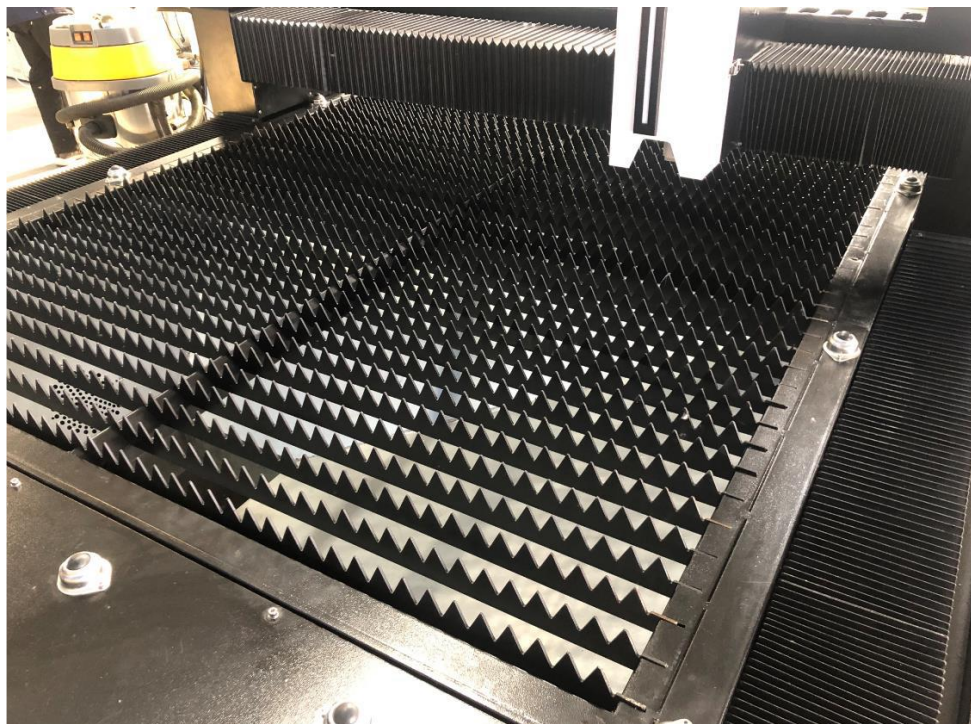

Saw-shape machine table holds metal sheet steady with little touch with metal sheet. The saws are thick and durable. Machine table size is 1500mm by3000mm.


- **Lézervédelmi burkolat / Full cover with CE security glass (OPTION)**

In front door, the glass is CE security glass. Machine left and right side, they are normal glasses.

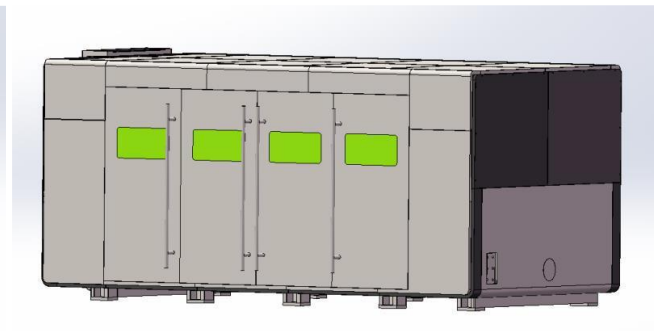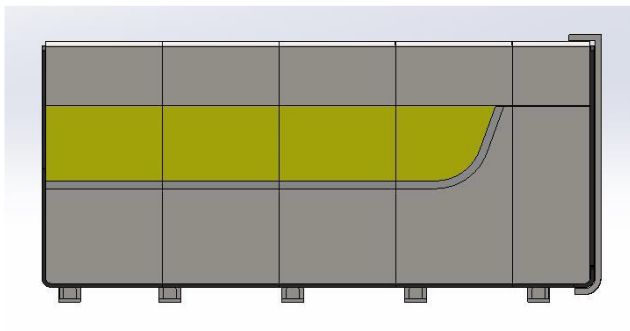



- **Lemez behelyezése lézervédelmi burkolat esetén / Material Loading System (OPTION)**


The machine has folding doors at right side, through which you can load the metal sheets to the machine table. For easier loading of metal sheet, we build the machine with nylon shaft besides the machine table. The shaft is higher than the machine table and Y-axis movement structure, so the metal sheet won't be blocked. Nylon shaft (instead of metal shaft) will not scratch the metal sheet.

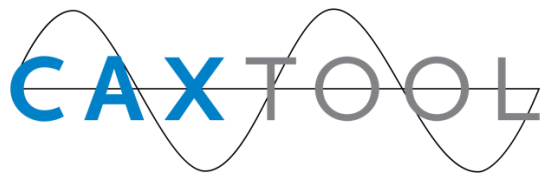

Caxtool Kft.  
6791 Szeged, Dorozsmai út 157. EU  
+36 62 254 826  
+36 30 565 1812  
[d.zanocz@caxtool.hu](mailto:d.zanocz@caxtool.hu)  
[info@caxtool.hu](mailto:info@caxtool.hu)

Adószám: 12871856-2-06  
Adószám: HU 12871856  
Bankszámla száma: 57600101-11102986  
SWIFT (BIC): TAKBHUHB  
IBAN: HUG5 57600101 11102986 00000000  
cégjegyzékszám: 06-09-014002  
info:

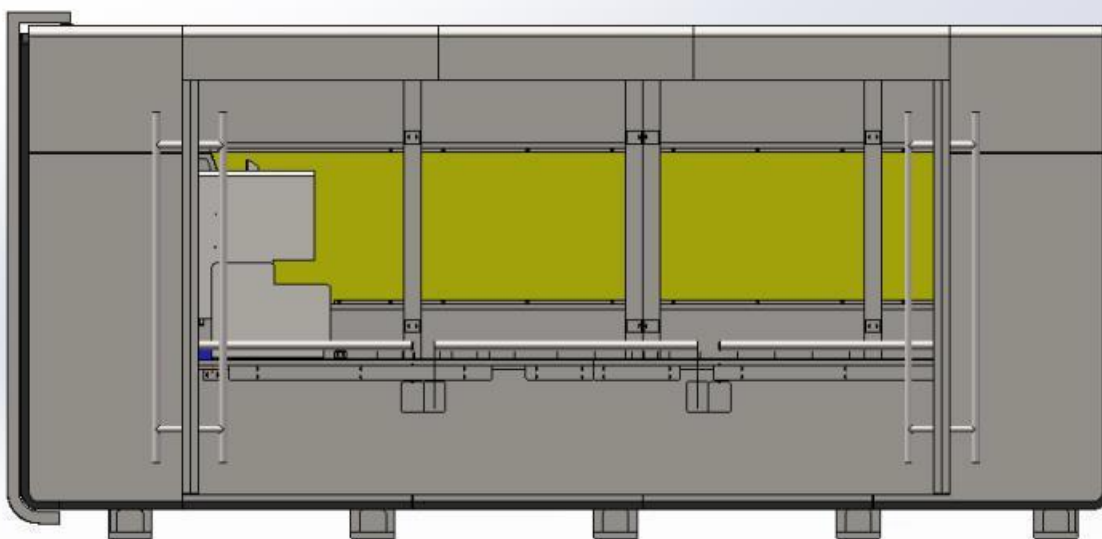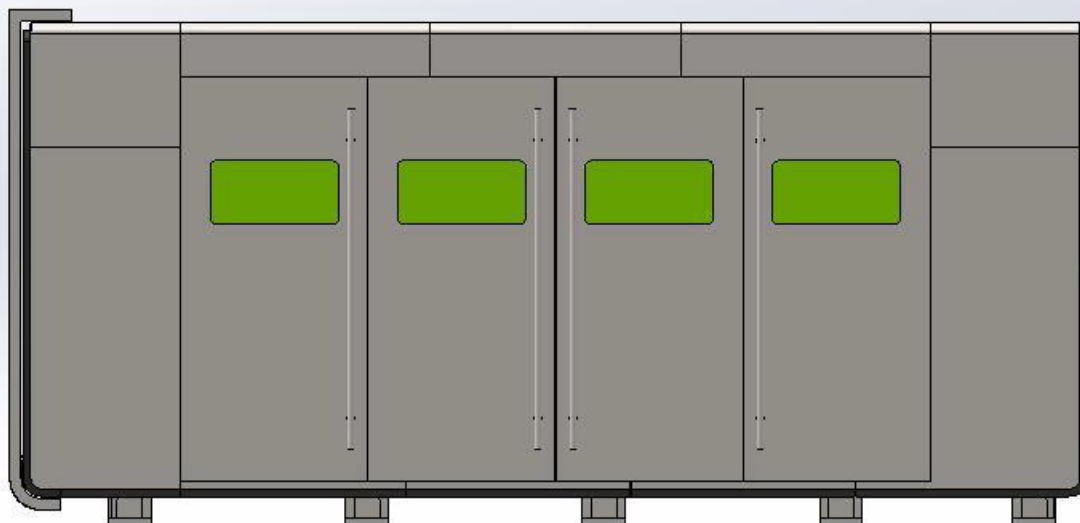

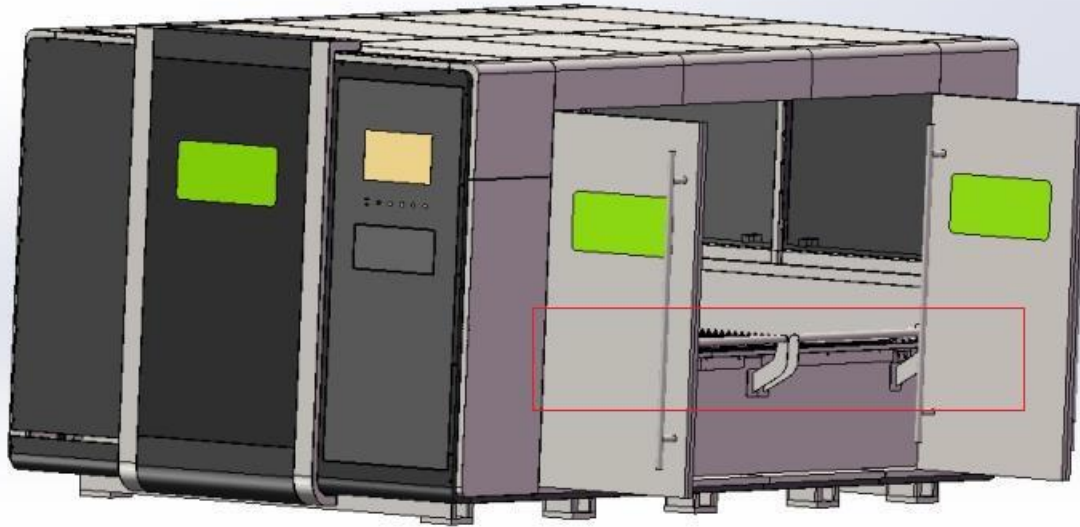

Nylon shaft assisting metal sheet loading

- Lézervédelmi szemüveg / Safety goggles

